



# **bizhub c550**; Color A3 multifunctional





## **CUSTOMER BENEFITS**

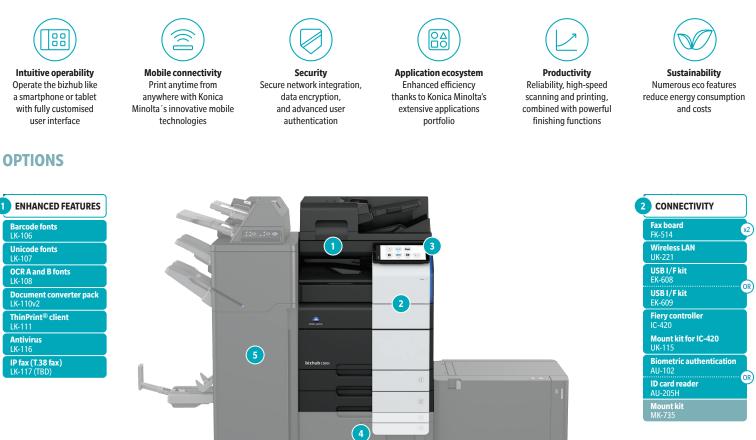

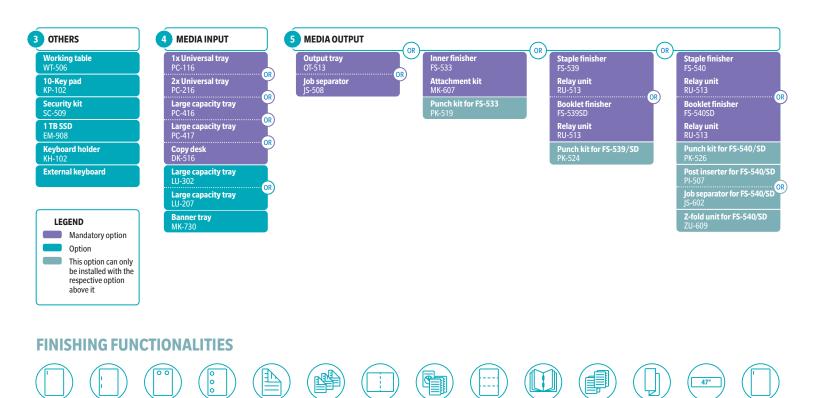

2

Corner

stapling

Two-point

stapling

Two-hole

punching

Three-hole

punching

Duplex

Combined

mixplex/

mixmedia

Half-fold

Sheet

insertion

Tri-fold

Booklet

Offset

sorting

Z-fold

Banner

printing

Corner

stapling (offline)

### **DESCRIPTION**

### ENHANCED FEATURES

LK-106 Barcode fonts	Supports native barcode printing
LK-107 Unicode fonts	Supports native Unicode printing
LK-108 OCR A and B fonts	Supports native OCR A and B font printing
LK-110v2 Document file conversion	Supports Searchable PDF and OOXML (DOCX, XLSX, etc.) file formats
LK-111 ThinPrint client	Print data compression for reduced network impact
LK-116 Antivirus	Bitdefender <sup>®</sup> antivirus provides real time scanning of all incoming and outgoing data
LK-117 IP fax (T.38 fax)	Fax over IP networks (T.38), requires fax kit

#### CONNECTIVITY

FK-514 Fax board	Super G3 fax, digital fax functionality
UK-221 Wireless LAN	Wireless LAN and wireless LAN Access Point Mode
EK-608 USB I/F kit	USB keyboard connection
EK-609 USB I/F kit	USB keyboard connection, Bluetooth
IC-420 Fiery controller	Professional color print controller
VI-516 Interface kit for IC-420	Fiery controller interface card
UK-115 Mount kit	Fiery controller mount kit
AU-102 Biometric authentication	Finger vein scanner
AU-205H ID card reader	Supports various ID card technologies
MK-735 Mount kit	Installation kit for ID card reader

### OTHERS

WT-506 Working table	Authentication device placement
KP-102 10-Key pad	For numeric entry instead of touchscreen
SC-509 Security kit	Copy guard function
EM-908 SSD	1 TB SSD to increase storage space
KH-102 Keyboard holder	To place USB keyboard
External keyboard	Keyboard for alpha numeric data entry

#### PC-216 2x Universal tray 2x 500 sheets / 5.5" x 8.5" - 11" x 17" / 52-256 g/m<sup>2</sup> PC-416 Large capacity tray 2,500 sheets / 8.5" x 11" / 52–256 g/m² $\,$ 1,500 + 1,000 sheets / 5.5" x 8.5" or 8.5" x 11" / PC-417 Large capacity tray 52-256 g/m<sup>2</sup> LU-302 Large capacity tray 3,000 sheets / 8.5" x 11" / 52-256 g/m<sup>2</sup> LU-207 Large capacity tray 2,500 sheets / 8.5" x 11" – 12" x 18" / 52–256 g/m² Multipage banner feeding MK-730 Banner tray DK-516 Copier desk Provides storage space for print media and other materials MEDIA OUTPUT Output tray used instead of finisher OT-513 Output tray JS-508 Job separator Separation of fax output; etc. 50-sheet stapling, 500 sheets max. output FS-533 Inner finisher MK-607 Attachment kit For FS-533 installation 2/4 hole punching, auto switching PK-519 Punch kit for FS-533 50-sheet stapling / 3,200 sheets max. output FS-539 Staple finisher FS-539SD Booklet finisher 50-sheet stapling / 20-sheet booklet finisher / 2,200 sheets max. output PK-524 Punch kit for FS-539/SD 2/3 hole punching, auto switching FS-540 Staple finisher 100-sheet stapling / 3,200 sheets max. output FS-540SD Booklet finisher 100-sheet stapling / 20-sheet booklet finisher / 2,700 sheets max. output PK-526 Punch kit for FS-540/SD 2/3 hole punching, auto switching RU-513 Relay unit For FS-539/SD or FS-540/SD installation JS-602 Job separator for FS-540/SD Separation of fax output, etc.

500 sheets / 5.5" x 8.5" - 11" x 17" / 52-256 g/m<sup>2</sup>

 PI-507 Post inserter for FS-540/SD
 Cover insertion, post finishing

 ZU-609 Z-fold unit for FS-540/SD
 Z-fold for 11" x 17" prints

MEDIA INPUT PC-116 1x Universal tray

### **TECHNICAL SPECIFICATIONS**

### SYSTEM SPECIFICATIONS

SYSTEM SPECIFICATIONS	
System speed 8.5" x11"	Up to 55/55 ppm (mono/color)
System speed 11" x 17"	Up to 27/27 ppm (mono/color)
Auto duplex speed 8.5" x 11"	Up to 55/55 ppm (mono/color)
1st page out time 8.5" x 11"	3.3/4.3 sec. (mono/color)
Warm-up time	Approx. 14/16 sec. (mono/color) <sup>1</sup>
Imaging technology	Laser
Toner technology	Simitri <sup>®</sup> HD polymerized toner
Panel size/resolution	10.1" / 1,024 x 600
System memory	8 GB (standard/max.)
System hard drive	256 GB SSD (standard) / 1 TB SSD (optional)
Interface	10/100/1,000-Base-T Ethernet, USB 2.0,
	Wi-Fi 802.11 b/g/n/ac (optional)
Network protocols	TCP/IP (IPv4 / IPv6) / SMB / LPD / IPP / SNMP /
	HTTP(S) / Bonjour
Automatic document feeder	Up to 300 originals / 5.5" x 8.5" – 11" x 17" /
	35–210 g/m <sup>2</sup> / Dualscan ADF
ADF double feed detection	Standard
Printable paper size	3.5" x 5.5" – 12" x 18" / customized paper sizes / banner paper max.47.2" x 11.7"
Printable paper weight	52–300 g/m <sup>2</sup>
Paper input capacity	1,150 sheets / 6,650 sheets (standard/max.)
Paper tray input (standard)	1 x 500 / 3.5" x 5.8" – 11" x 17" / custom sizes / 52–256 g/m <sup>2</sup> 1 x 500 / 5.5" x 8.5" – 12" x 18" / custom sizes / 52–256 g/m <sup>2</sup>
Paper tray input (optional)	1 x 500 / 5.5" x 8.5" - 11" x 17" / 52-256 g/m <sup>2</sup> 2 x 500 / 5.5" x 8.5" - 11" x 17" / 52-256 g/m <sup>2</sup> 1 x 2,500 / 8.5" x 11" / 52-256 g/m <sup>2</sup> 1 x 1,500 + 1 x 1,000 sheets / 5.5" x 8.5" or 8.5" x 11" / 52-256 g/m <sup>2</sup>

Large capacity tray (optional)	1 x 3,000 / 8.5" x 11" / 52–256 g/m²
	1 x 2,500/ 8.5" x 11" – 12" x 18" / custom sizes /
	52–256 g/m <sup>2</sup>
Manual bypass	150 sheets / 3.5" x 5.5" – 12" x 18" / custom sizes /
	banner / 60-300 g/m <sup>2</sup>
Finishing modes (optional)	Offset, Group, Sort, Staple, Staple (offline), Punch,
	Half-fold, Letter-fold, Booklet, Post insertion, Z-fold
Automatic duplexing	4.1" x 5.5" – 12" x 18" / 52–256 g/m²
Output capacity	Up to 250 sheets / up to 3,300 sheets (standard/max.)
Stapling	Max. 100 sheets or 98 sheets + 2 cover sheets
	(up to 300 g/m <sup>2</sup> )
Stapling output capacity	Max. 200 sets
Letter fold	Max. 3 sheets
Letter fold capacity	Max. 50 sets, unlimited (without tray)
Booklet	Max. 20 sheets or 19 sheets + 1 cover sheet
	(up to 300 g/m²)
Booklet output capacity	Max. 35 booklets, unlimited (without tray)
Duty cycle (monthly)	Max. <sup>2</sup> 200,000 pages
Toner lifetime	Black up to 28,000 pages
	CMY up to 28,000 pages
Imaging unit lifetime	Black up to 240,000/1,000,000 pages (drum/developer)
	CMY up to 165,000/1,000,000 pages (drum/developer)
Power consumption	110-120 V / 60 Hz, Less than 1.6 kW
System dimension (W x D x H)	24.2" x 27.1" x 37.8" (without options)
System weight	Approx. 220 lb (without options)

### PRINTER SPECIFICATIONS

Δ

1,800 (equivalent) x 600 dpi, 1,200 x 1,200 dpi
PCL 6 (XL3.0), PCL 5c, PostScript 3 (CPSI 3016), XPS
Windows 7 (32/64), Windows 8.1 (32/64), Windows 10 (32/64), Windows Server 2008 (32/64), Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, Macintosh OS X 10.10 or later, Unix, Linux, Citrix
80 PCL Latin, 137 PostScript 3 Emulation Latin
AirPrint (iOS), Mopria (Android), Konica Minolta Print Service (Android), Konica Minolta Mobile Print (iOS/Android) Optional: Google Cloud Print, Wi-Fi Direct

#### PRINTER SPECIFICATIONS (OPTIONAL)

Print controller	Embedded Fiery IC-420
Controller CPU	AMD GX-424CC @ 2.4 GHz
Memory/HDD	4 GB / 500 GB
Page description language	Adobe PostScript 3 (CPSI 3020), PCL 6, PCL 5c
Operating systems	Windows 7 (32/64), Windows 8.1 (32/64), Windows 10 (32/64), Windows Server 2008 (32/64), Windows Server 2008 R2, Windows Server 2012, Windows Server 2012 R2, Windows Server 2016, Windows Server 2019, Macintosh OS X 10.10 or later, Linux

### SCANNER SPECIFICATIONS

Scan speed	Up to 140/140 ipm in simplex (mono/color) Up to 280/280 ipm in duplex (mono/color)
Scan resolution	Up to 600 x 600 dpi
Scan modes	Scan-to-eMail (Scan-to-Me), Scan-to-SMB (Scan-to- Home), Scan-to-FTP, Scan-to-Box, Scan-to-USB, Scan- to-WebDAV, Scan-to-DPWS, Scan-to-URL, TWAIN scan
File formats	JPEG, TIFF, PDF, Compact PDF, Encrypted PDF, XPS, Compact XPS, PPTX Optional: Searchable PDF, PDF/A 1a and 1b, Searchable DOCX/PPTX/XLSX
Scan destinations	2,000 destinations + 100 groups, LDAP support

### COPIER SPECIFICATIONS

Copy resolution	600 x 600 dpi
Gradation	256 gradations
Multicopy	1-9,999
Original format	Max. 11" x 17"
Magnification	25–400% in 0.1% steps, Auto zoom

Fax standard	Super G3 (optional)
Fax transmission	Analog, i-Fax, Color i-Fax, IP-Fax
Fax resolution	Up to 600 x 600 dpi
Fax compression	MH, MR, MMR, JBIG
Fax modem	Up to 33.6 Kbps
Fax destinations	2,000 single + 100 groups
USER BOX SPECIFICATIONS	
Storable documents	Up to 3,000 documents or 10,000 pages
Type of user boxes	Public, Personal (with password or authentication), Group (with authentication)
Type of system boxes	Secure print, Encrypted PDF print, Fax receipt, Fax polling
SYSTEM FEATURES	
Security	ISO 15408 HCD-PP Common Criteria (in evaluation), IP filtering and port blocking, SSL3 and TLS1.0/1.1/1.2 network communication, IPsec support, IEEE 802.1x support, User authentication, Authentication log, Secure print, Kerberos, Hard drive data encryption (AES 256), Confidential fax, Print user data encryption

FAX SPECIFICATIONS

	Copy protection (Copy Guard, Password Copy)
Accounting	Up to 1,000 user accounts, Active Directory support (user name + password + e-mail + smb folder), User function access definition, Authentication by mobile device (Android) Optional: Biometric authentication (finger vein scanner), ID card authentication (ID card reader), Authentication by mobile device (iOS)
Software	Net Care Device Manager, Data Administrator, Box Operator, Web Connection, Print Status Notifier, Driver Packaging Utility, Log Management Utility

Optional: Antivirus scanning (Bitdefender<sup>®</sup>),

<sup>1</sup> Warm-up time may vary depending on the operating environment and usage.

- <sup>2</sup> Maximum monthly copy/print volume supported under standard vendor-supplied service defines the upper end of expected customer volume for the device. Customers should consider multiple machines if average monthly volume approaches duty cycle on a continual basis.
- All specifications refer to 8.5" x 11" paper of 80 g/m<sup>2</sup> weight.
- The support and availability of the listed specifications and functionalities vary depending on operating
  systems, applications and network protocols as well as network and system configurations.
- The stated life expectancy of each consumable is based on specific operating conditions such as page coverage for a particular page size (5% coverage of 8.5" x 11"). The actual life of each consumable will vary depending on use and other printing variables including page coverage, page size, media type, continuous or intermittent printing, ambient temperature and humidity.
   Some of the product illustrations contain optional accessories.
- Specifications and accessories are based on the information available at the time of printing and are subject to change without notice.
- Konica Minolta does not warrant that any specifications mentioned will be error-free















For complete information on Konica Minolta products and solutions, please visit: **CountOnKonicaMinolta.com** 

© 2022 KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. All rights reserved. Reproduction in whole or in part without written permission is prohibited. KONICA MINOLTA, the KONICA MINOLTA logo and bizhub are registered trademarks or trademarks of KONICA MINOLTA, INC. All other product and brand names are trademarks or registered trademarks of their respective companies or organizations. All features and functions described here may not be available on some products. Design & specifications are subject to change without notice.



KONICA MINOLTA BUSINESS SOLUTIONS U.S.A., INC. 100 Williams Drive, Ramsey, New Jersey 07446

### CountOnKonicaMinolta.com



